
simplicity visibility collaboration



LinkRunner® Next Generation Network & Cable Testers

Customer AT 400
 Customer AT 400
 Customer AT 400
 Customer AT 400
 Customer AT 500
 C



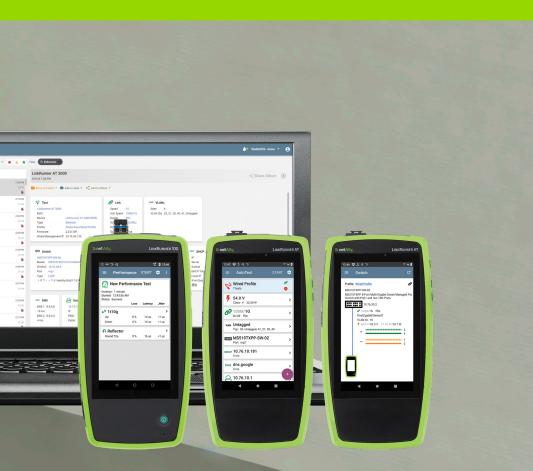

netally.com


LinkRunner[®] Built on history, expertise, and innovation.

For decades our family of innovative network test solutions have been helping engineers and technicians better manage, maintain, and secure today's complex wired and wireless networks.

The **LinkRunner**[®] brand has been one of the most trusted names in network and cable test solutions, with thousands of frontline technicians all over the world relying on the functionality of these handy testers to validate and troubleshoot Ethernet network connectivity.

When it comes to innovative, reliable, best-in-class portable network testing and edge security solutions, **NetAlly** is the name to trust. Our leading-edge, highly intuitive tools get the job done fast by...

- Simplifying the complexities of network testing and security assessment
- Providing instant visibility for efficient problem solving and vulnerability detection
- Enabling seamless collaboration between site personnel and remote experts

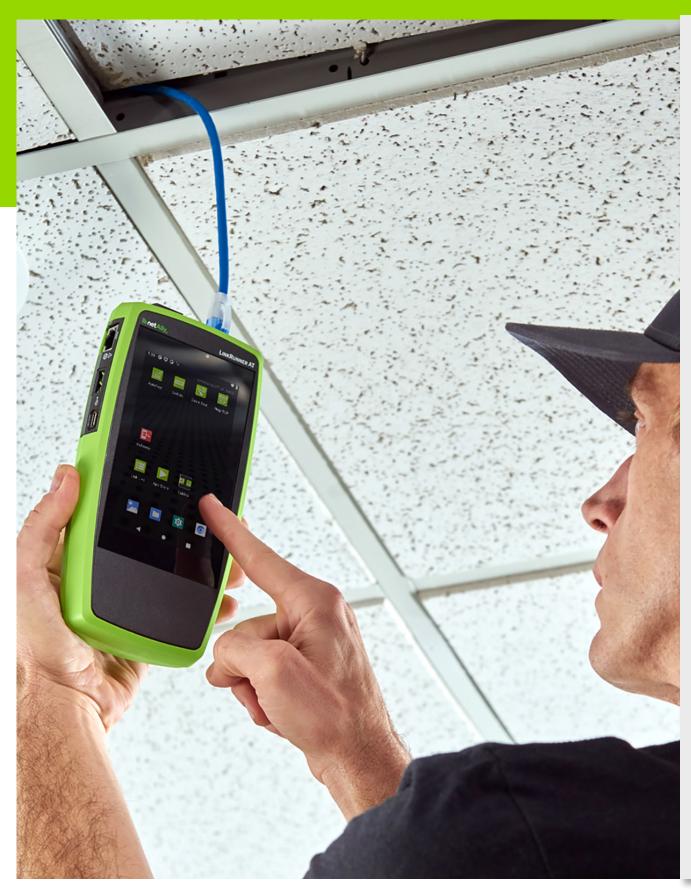





SIMPLICITY

- Eliminate wasted time with a simple, fast AutoTest, which makes novices more productive and experts more efficient
- Installation validation report provides proof of performance
- Standardized procedures ensure the job is done right, consistently



VISIBILITY

- See issues others cannot
- More people can solve more problems on their own
- Solve problems with fewer tools
- Faster mean time to resolution



COLLABORATION

- Facilitating collaboration speeds problem resolution and frees up team resources
- Automated documentation speeds future projects and troubleshooting
- Easy report generation and sharing stops finger-pointing

LinkRunner[®]

Next Generation Cable & Network Testers

The **LinkRunner** family is designed for engineers and technicians who need fast and comprehensive validation of copper and fiber network links with powerful network connectivity troubleshooting. While offering the same core functions of its predecessors, the next generation LinkRunners introduce advanced cable and network testing for Multigigabit NBASE-T and fiber Ethernet networks with our purpose-built AllyWare[™] technology.



LinkRunner[®] 10G

ADVANCED MULTIGIGABIT/10G CABLE & NETWORK TESTER

With network bandwidth demands increasing, gaining visibility into choke points, latency, and packet loss issues is more important than ever. Quickly test, verify, and troubleshoot line-rate 1Gig, Multi-Gig and 10Gig Ethernet with our high-performance, handheld, multi-function tester.

MODELS: LR10G-200 • LR10G-200-KIT • EXG-300-LR10G2-KIT

LinkRunner[®] AT 4000 **ADVANCED ETHERNET TESTER**

The LinkRunner AT 4000 is an advanced cable and network tester for Multigigabit NBASE-T and fiber Ethernet networks, including comprehensive network discovery and topology mapping with advanced diagnostics and problem detection for in-depth troubleshooting.

MODELS: LRAT-4000 • LRAT-4000-KIT • LINKSOLUTIONS-KT-4K

LinkRunner[®] AT 3000 **COPPER & FIBER ETHERNET AUTOTESTER**

The LinkRunner AT 3000 is designed for frontline technicians and engineers who need fast and comprehensive validation of network links and powerful copper and fiber network connectivity troubleshooting.

MODELS: LRAT-3000 • LRAT-3000-KIT • LINKSOLUTIONS-KT-3K















LinkRunner[®] Purpose-Built with AllyWare[™]

NetAlly's **LinkRunner** testers are built on our **AllyWare** common technology platform, united in Link-Live for collaboration, analysis, and reporting. For organizations that use different NetAlly tools for different jobs, this provides valuable benefits:

- **CONSISTENCY OF DATA** regardless of the tool used, a common dataset means teams do not have to synthesize or normalize data coming from different sources.
- **EFFICIENCY** all data from every tool rolls up to Link-Live to facilitate team & project management, speed problem resolution, and automatically document results.
- SPEED OF ONBOARDING common apps and processes enables staff to quickly train new hires.
- **FLEXIBILITY** once trained / onboarded, anyone can use any NetAlly tool.

AllyWare Common Technology Platform*		<u>Curitata</u>		PING TCP	01011 107		ß	Gbps	Performance		(Mbps		
	AutoTest	Switch	Cable Test	Ping/TCP	Capture	Discovery	Path Analysis	Performance	Reflector	LANBERT™	iPerf	Link-Live	App Store
LinkRunner 10G	•	•	•	•	•	•	•	•		•		•	•
LinkRunner AT 4000	•	•	•	•	•	•	•		•	•	•	•	•
LinkRunner AT 3000	•	•	•	•					•	•		•	•




*Depending on each product's capabilities, AllyCare-enabled features can include Advanced Topology Mapping in Link-Live, and Remote View Control; these features are only available to customers with AllyCare support.

₄ metAlly.




LinkRunner® AT 3000/AT 4000/10G Essential Link Testing

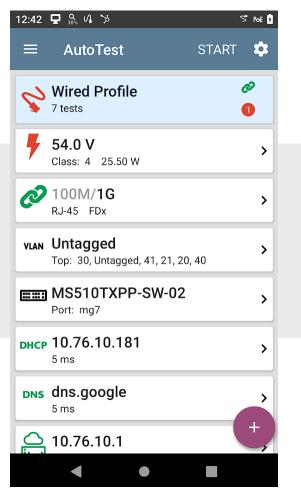

AUTOTEST AND PROFILES

Comprehensive network link test validates all aspects of network connectivity.



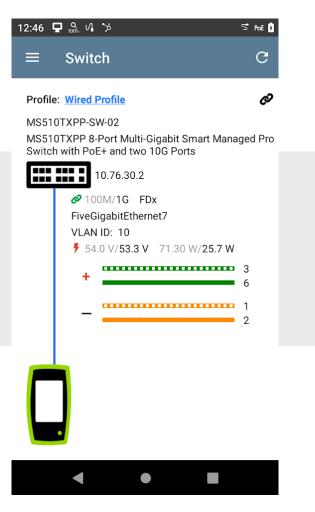

SWITCH TEST

Identifies the nearest connected switch and critical configuration information using LLDP, CDP, and EDP.

12:24	₽ ‰ vi >>		2
≡	Cable Test	STA	RT :
			5
1	The second second	1	10 ft
2 3		2 3	10 ft
6 4 5		6 4 5	10 ft
7		7 8	10 ft
sh		sh	
	< ●		

CABLE TEST

Validate cabling for proper termination, test for length, common miswires, and distance to fault.


Contraction in			
netA	.lly _∞	LINKRUNN	IER AT
12:4	2 🖵 🔍 📢 🏷	5 106	
	AutoTest	START	×
9	Wired Profile	ø 1	
,	54.0 V Class: 4 25.50 W	:	
0	2 100M/1G RJ-45 FDx	:	
VL	N Untagged Top: 30, Untagged, 4		

12:56 🖵 🎡 🕠 🏷	
	ect
PING TCP 10.76.30.10	
Device Name: EWS377A	2
IP Address: 10.76.30.10 MAC Address: Port: 80 (www-http) Interface: Wired Port)
Results Started: 12:53:51 PM Status: Success	
Metric	
Sent	
Received	
Lost	
Response Time 5 ms 4 ms 3 ms 2 ms 1 ms	
0 ms 12:54:49 PM	
	Сι
Response	1 m
•	

PING/TCP TEST

Verify connectivity to on or offnetwork devices, ensure TCP port availability, trend results over 24 hours to detect intermittent issues.



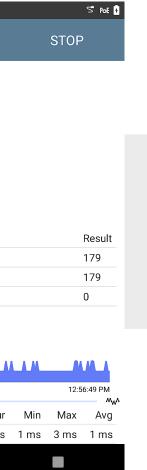

SFP 1G				
Duration: 10 seconds Started: 8/13 6:22 PM Status: Success				
rame Totals				
Sent		15	,722,330	
Received		15	,722,330	
Errored			0	
Error Rate			0%	
Lost			0	
Loss Rate			0%	
Severe Loss Secon	ds		0	
5			0	
5 4 3 2 1		Мах		~~~
Frored Frames (at 1,5)	76,229 fps)	Max 0		w^

LANBERT™¹

LANBERT on LinkRunner AT generates and measures the transmission of linerate Ethernet frames over your network cabling infrastructure, qualifying its ability to support up to 1 Gbps on copper and fiber links.


LinkRunner[®] AT 4000/10G **Deeper Network Visibility**

Without the right visibility, it's difficult to resolve problems that impact multiple devices and network segments. NetAlly's **LinkRunner AT** 4000 and LinkRunner 10G are advanced cable and network testers for Multigigabit NBASE-T and fiber Ethernet networks. They feature comprehensive network discovery and topology mapping with advanced diagnostics and problem detection for in-depth troubleshooting.

Using network discovery plus layer 2 and 3 path analysis, they provide full visibility to help resolve issues impacting multiple devices - not just a single link - while still providing the automated tests for moves, adds, and changes validation and troubleshooting that the LinkRunner family of testers is known for.

<u>mnetAlly</u>

6

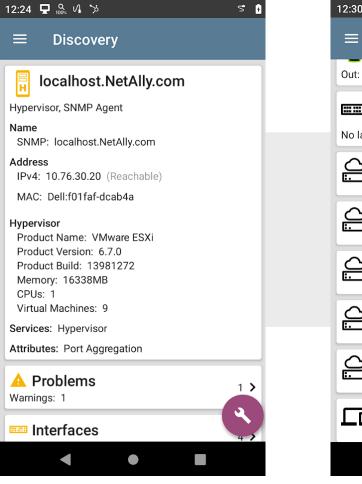

NETWORK DISCOVERY


Discover network devices, endpoints, and common problems across multiple VLANs, plus generate Topology Maps in Link-Live.

12:30 🖵 🔐 🗘 汝 Path Analysis Out: Wired Port Layer 2 Path No layer 2 devices discovered 10.76.10.1 16 ms. 14 ms. 16 ms No Reply Google-level3-Denver1.Level... , 4 ms, 18 ms, 14 ms Hop: 3 **216.239.56.151** 16 ms, 16 ms, 18 ms Split Route 16 ms. 16 ms. 14 ms www.google.com 16 ms, 16 ms, 14 ms

PATH ANALYSIS Shows the switch/router path to

any connected device.



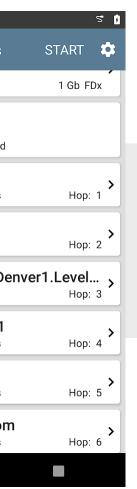

2:51 5	₽ _{100%} V, ≯				St Poe 🖡
≡	iPerf		STA	रा 🕻	* :
	New iPerf T	est			
Device	Name: <u>10.76.3</u>	<u>0.107</u>			
	dress: 10.76.30 ace: Wired Port	.107			
Starte	on: 10 seconds d: 2:50:33 PM s: Success				
TCP Throu	ughput Up (Mbps)				
600 500 400 300 200 100					
0 2:50	:35 PM			2	:50:44 PM
~					~~~
		Cur	Min	Max	Avg
Thro	oughput Up	586.8	554.6	598.9	584.7
Lim	it				200.0
TCP Thro	ughput Down (Mbps))			



IPERF

Runs an iPerf3 performance test to a NetAlly Test Accessory or an iPerf server endpoint.


LinkRunner® AT 4000/10G Deeper Network Visibility

[™] 44 100% 🏷 📢 🖵	5 💎 🛿 2:05
\equiv Periodic AutoTest	
Periodic AutoTest Enabled	•
Interval 3 minutes	
Duration 10 minutes	
Add Comment Enabled	
Comment Notification Test	
Append Date & Time Enabled	•
< 0	

PERIODIC AUTOTEST Enables monitoring infrastructure

for intermittent issues.




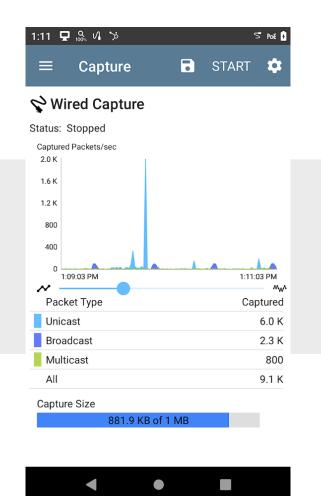

CAPTURE Packet capture for in-depth analysis.

Choose the Right LinkRunner for You

LEARN MORE

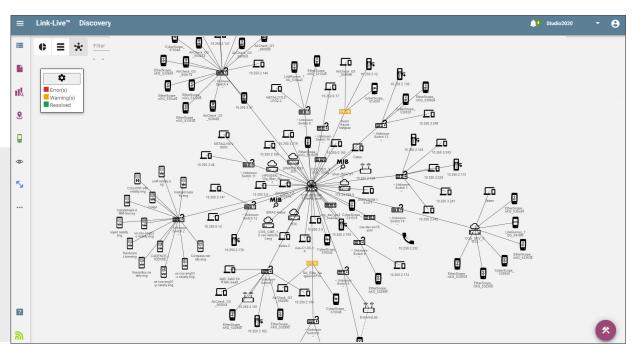

TOPOLOGY MAPPING IN LINK-LIVE

These comprehensive, up-to-the-minute-accurate network diagrams show your network as it is NOW, integrating Layer 2 and Layer 3 topology information, including these connections: switch to host, switch to Access Point, AP to Wi-Fi client, switch to switch, switch to router, and router to router hops.

Users can interact with the network layout in a flexible map-based user interface to quickly identify configuration and topology issues, speeding troubleshooting, and automatically create updated network documentation

Color-coded icons s for investigation.



Color-coded icons show devices with warnings or errors; click to drill-down

LinkRunner[®] 10G High Performance Testing for 10 Mbps to 10 Gig

The **LinkRunner 10G** advanced cable and network tester is a highperformance solution for 10 Gig network testing, including Multi-Gig. It simplifies testing and configuration of copper and fiber Ethernet networks by combining essential functions of installation and triage in a single, ruggedized unit, with the ability to link and test at line-rate speeds from 10Mbps to 10Gbps including 2.5 and 5 Gbps NBASE-T.

This next-generation tester delivers complete network validation, qualification and troubleshooting, from the media (copper/ fiber) to the application (layers 1-7), accelerating deployments, speeding problem identification, and improving the efficiency and effectiveness of network installers and operations teams.

	⊯ 🛥		0 10:08	161 VNC
≡ Aut	toTest			≡
	/1G/2.5G/5G, HDx/FDx	/10G		Gbps
Speed Advertised Sp Actual Speed	peeds: 100M/1G/2 : 10G	.5G/5G/10)G	Duratio Starteo Status
Duplex Advertised Du Actual Duplex	ıplex: HDx/FDx :: FDx			↓ ↑ 1 Up
RJ-45 Details Rx Pair: All				Dov
Multi-Gigabit D Channel	etails Skew Delay	SNR	Min SNR	₽ R
A	REF	9.3 dB	8.3 dB	Rou
В	-1.25 ns	6.7 dB	-0.6 dB 😑	
	-2.50 ns	7.6 dB	6.8 dB	
С				
C D	-1.25 ns	8.9 dB	7.8 dB	

MULTI-GIG LINK VALIDATION


Connect and test at line-rate 1, 2.5, 5, and 10 Gbps and warns on link speed 'downshifting'.

() New Perfor	manc	e Test	
Duration: 1 minute Started: 12:43:56 AM Status: Success			
	Loss	Latency	Jitter
↓ 1 1t10g			;
Up	0 %	14 us	<1 us
Down	0 %	14 us	<1 us
Reflector			;
Round Trip	0 %	16 us	<1 us

10G COPPER/FIBER PERFORMANCE TEST

Two LinkRunner 10G units can be used to test upstream/downstream network performance at line-rate for measuring bandwidth, QoS, and service provider SLAs between sites.





RJ-45 10M/100M/1	1G/2.5G/5G/	10G HDx/F	Dx	
Duration: 24 hours Started: 3/26 5:41 Status: Success	PM			
Totals				
Frames Sent		1,227,293		
Frames Receive	d	1,227,293,959,97		
Errored Frames			11	
Error Rate			0 %	
5 4 3 2 1		11	Ĩ	
4 3 2	Cur	ll Avg	5:41:33 PM Max	
4 3 2 1 0	Cur	II Avg 0		
4 2 5.41:33 PM		•	Max	
4 3 0 5:41:33 PM		0	Max 2	
<pre>4 3 2 1 5.41:33 PM Errored Frames Limit</pre>		0	Max 2 148 <0.001 % Min SNR 6 dB 3.9 dB	

LANBERT^{™1}

LANBERT generates and measures the transmission of line-rate Ethernet frames over your network cabling infrastructure, qualifying its ability to support up to 1G/10G on fiber and 100M/1G/2.5G/5G/10G on copper links.

LinkRunner® Collaboration, Reporting, and Apps






LINK-LIVE COLLABORATION, REPORTING & ANALYSIS PLATFORM

Available as a free cloud service or licensed private cloud/on-premise deployment, the Link-Live collaboration, reporting, and analysis platform transforms team workflows, allowing IT professionals to quickly and easily log, document, and report test activity from all NetAlly hand-held network testers and analyzers, enabling collaboration across your entire team.



Q.besh - 💼 - 🛅 - 🔹	• •				
0 0000		Juliois Demo EX3-300 International			< Share Albur
9 654271001430, Anky Jacks A 0014	1	Add a Label V CARD	e Alberti v		
C Sector Same Same Section S Cott, per cont B Anno C S Anth Same Test Assesser V	11294 2000 11244 2000	Teel Julio Genera (NG 300 Brail: Cherchean HD Double: Cherchean HD Too: Cherchean HD Too: Cherchean HD Hulle: Tabuc Hudle	Pell Vote 64.5 V Laded 54.1 V Brig Power 13.00 K Dave 0 Rod Power 13.00 K Dave 0 Power Power 0 Power Anno 100 K Dave 0 Power Anno 100 K Dave 0	Via Via Via Via Via Via Andrám Via Andrám Via Andrám Via Via	Disconsection Disconsection Disconsection Model Model
P A ANY DATA DEL ANY	21200 21220 21220 21220	Fermon 24188	PBETgor Tgorloo Tharborst Power 13.0 at	Optical Fahar Sutteen	Port egg) MAN 1 Fige Littler Decargos and All and All and Notice at Mathematical and All and All and Cellinations charter
V printen og kan berer og kan berer V printen og kan berer	1747W	pion	- 046	Catoway	△ we
V monte beer data an V monte carr		Server 17224163 Salanet 2553932860 DHCP3Aal 2022ms	0001 0.000 0005 0.044 2005	PT103001 extually com P 172234361 PM6 2 cm, 2 ma, 3 m PA06 30 (2) 223 236 198	Https://www.google.com Name pingle IP 5423551011204 Data Tumber II me
2 mail tube	11000	Success			Total Time 384 me Rote 3.3 Mode Sussess, GK (HTTP 200)

- Easily unify results, reporting, and data management in a secure cloud portal or containerized, licensed subscription version.
- Better manage jobs, improve staff efficiency, and facilitate team collaboration.

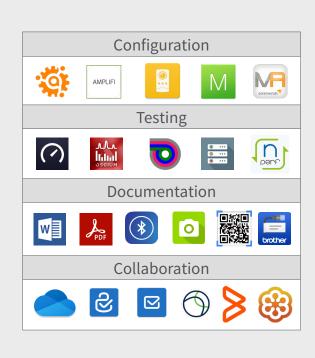


APP STORE

Expand tester functionality through the use of third-party apps

NOTE: Product registration required to install third-party apps on the LinkRunner AT 3000.



ity through ps uired to LinkRunner



WI-FI CONNECTIVITY SUPPORT

Using an optional USB-A based Wi-Fi adapter provides on-the-go connectivity for uploading test results to Link-Live, web remote control, conducting basic Wi-Fi diagnostics, and more with thirdparty apps.

Choose the Right LinkRunner for You

TESTING APP / FEATURE	LINKRUNNER 10G	LINKRUNNER AT 4000	LINKRUNN
AUTOTEST & PROFILES	•	•	•
SWITCH TEST	•	•	•
CABLE TEST	•	•	
PING/TCP TEST	•	•	•
PERFORMANCE TEST REFLECTOR	•	•	•
LANBERT [™] MEDIA QUALIFICATION ¹	Up to 10 Gbps	Up to 1Gbps	Up to
PERFORMANCE TEST CONTROLLER + PEER ¹	•		
DISCOVERY / TOPOLOGY MAPPING (in Link-Live™)	•	•	
PATH ANALYSIS	•	•	
CAPTURE	•	•	
IPERF	•	•	
HTTP / FTP RESPONSE TIME	•	•	
REMOTE VISIBILITY & CONTROL*	•	•	
WIFI CONNECTIVITY WITH OPTIONAL ADAPTER	•	•	
PERIODIC AUTOTEST	•	•	
CONNECT & VERIFY LINK SPEED/DUPLEX - 10M, 100M, 1G	•	•	•
CONNECT & VERIFY LINK SPEED/DUPLEX - MULTI-GIG/NBASE-T/10G	•		
LINK SPEED DETECTION - MULTI-GIG, NBASE-T/10G	•	•	•
INTEGRATED CAMERA, MICROPHONE, AND MICRO SD CARD	•		
INCLUDES 1-YEAR ALLYCARE PREMIUM SUPPORT	•	•	Opti





*Requires AllyCare Premium Support



ALLYCARE PREMIUM SUPPORT BENEFITS

AllyCare is a comprehensive support and maintenance service for NetAlly's network tools that offers significant value over standard warranty. By maintaining your AllyCare membership throughout the life of your product you can ensure your NetAlly handheld network tester is kept up to date with the latest features and functionality.

- Latest Software Updates
- AllyCare-Enabled Product Features
- Accessory Replacement
- **Repair Services Covered** •
- **Priority Support** •

LEARN MORE

Models

Model/Name	Description
LR10G-200	LinkRunner 10G Advanced Ethernet Tester - includes: (1) LR10G mainframe with one year of AllyCare support (LR10G-200-1YS), G3-F SFP+MR-10G850, RJ-45 inline coupler, WIREVIEW wire mapper #1, Quick Start Guide, and shoulder sling bag.
LR10G-200-KIT	LinkRunner 10G Professional Kit - includes: (1) LR10G mainframe with one year of AllyCare support (LR10G-200-1YS), G3-PWRADAPT LR10G-HOLSTER, SFP+MR-10G850, SFP+MR 10G1310, RJ-45 inline coupler, WIREVIEW wire mapper #1-6, Quick Start Guide, and med
EXG-300-LR10G2-KIT	Etherscope nXG 10G Performance Kit - includes: (1) EtherScope nXG (EXG-300-KIT) and (1) LinkRunner 10G (LR10G-200)
LRAT-4000	1G Advanced Ethernet Tester - includes: LinkRunner AT 4000 tester with 1 year of AllyCare support (LRAT-4000-1YS), Power Supply w power plugs, WireView Cable ID #1, RJ-45 coupler, 850nm multimode 1 Gbps SFP, Getting Started Guide and Shoulder Sling Bag and carry case.
LRAT-4000-KIT	1G Advanced Ethernet Tester Professional Kit - includes: LinkRunner AT 4000 tester with 1 year of AllyCare support (LRAT-4000-1YS) with regional power plugs, WireView Cable ID #1-#6, RJ-45 coupler, 850nm multimode 1 Gbps SFP, Holster, Getting Started Guide and Sling Bag.
LINKSOLUTIONS-KT-4K	1G Advanced Ethernet Tester Link Solutions Kit - includes: (1) LinkRunner AT 4000 tester (LRAT-4000) with 1 year of AllyCare suppor (LRAT-4000-1YS), (2) LinkSprinter network testers, (1) LinkRunner AT holster (HOLSTER-G3), and (2) LinkSprinter holsters.
LRAT-3000	Copper & Fiber Network AutoTester - includes: LinkRunner AT 3000 tester, Power Supply with regional power plugs, WireView Cable coupler, 850nm multimode 1 Gbps SFP, Quick Start Guide and small soft case.
LRAT-3000-KIT	Copper & Fiber Network AutoTester Professional Kit - includes: LinkRunner AT 3000 tester, Power Supply with regional power plugs Cable ID #1-#6, RJ-45 coupler, 850nm multimode 1 Gbps SFP, Holster, Quick Start Guide, and small soft case.
LINKSOLUTIONS-KT-3K	Copper & Fiber Network AutoTester Link Solutions Kit - includes: (1) LinkRunner AT 3000 tester (LRAT-3000), (2) LinkSprinter network LinkRunner AT holster (HOLSTER-G3), and (2) LinkSprinter holsters.

Products that are sold with 1-year AllyCare Support included have certain features and capabilities enabled. At the end of your existing contract, you must renew your AllyCare Support contract to continue utilizing the enabled features. AllyCare Support may not be available in all countries. Please confirm with your NetAlly representative before purchasing.



netally.com

-PWRADAPTER,

PTER, EXGedium soft case.

with regional dhardened

S), Power Supply nd Shoulder

ort

le ID #1, RJ-45

gs, WireView

ork testers, (1)



LinkRunner 10G KIT



LinkRunner AT 4000 KIT



LinkRunner AT 3000 KIT

Additional NetAlly Solutions

EtherScope[®] nXG **PORTABLE NETWORK EXPERT**

Deploying and maintaining Wi-Fi 6/6E and wired network infrastructure without the right tools can be daunting... and costly. This multi-technology, all-in-one handheld network analyzer enables engineers and technicians to get more done faster in today's constantly changing Wi-Fi and Ethernet access networks.

MODELS: EXG-300 • EXG-300-KIT • EXG-300-KIT-2PK EXG-300-LR10G2-KIT



AirCheck[®] G3 Pro WI-FI 6 WIRELESS ANALYZER

Intuitive user interface delivers actionable intelligence, speeding and simplifying Wi-Fi 6 deployment, troubleshooting, surveying, and validation. AirCheck G3 provides network professionals of any skill level with complete and accurate information to survey and validate Wi-Fi deployments and changes, resolve connectivity and performance problems quickly, speed up closure of trouble tickets and ensure your Wi-Fi network meets end users' needs.

MODELS: AIRCHECK-G3-PRO AIRCHECK-G3-PRO-KT AIRCHECK-G3-PRO-TKT







WIRED & WIRELESS ANALYSIS

CyberScope[®] **EDGE NETWORK VULNERABILITY SCANNER**

CyberScope offers comprehensive cyber security risk assessment, analysis, and reporting for the network edge in a single, powerful, portable tool – including network discovery, wireless security, vulnerability assessment, plus segmentation and provisioning validation. It provides fast, actionable insights, filling the critical visibility gaps that other cybersecurity tools frequently do not address.

- Easily validates controls at the edge
- Inventories everything including IoT, OT, unmanaged devices, wired, and wireless
- Quickly tests and demonstrates policy compliance
- Enables collaboration and sharing between teams

CyberScope is available in three different versions. The full function CE version includes wired Ethernet and wireless (Wi-Fi and BT/BLE) capabilities. Wired only (XRF) and wireless only (AIR) models are also available - specific capabilities depend on the version.

MODELS: CYBERSCOPE-CE • CYBERSCOPE-XRF • CYBERSCOPE-AIR



netally.com





CYBERSCOPE



CYBERSCOPE AIR

CYBERSECURITY

Toll-Free (North America) 1-844-878-2559 International +1-719-755-0770

©2024 NetAlly, LLC LRAT-IG-24-V4