

LIGHTTEL




Features Include:

- Focus easily, quickly
- Operate with one hand
- Create Auto-centered Analysis Reports
- Analyze live or frozen images
- Include notes with your Analysis Reports
- Use IEC 61300-3-35 analysis criteria, or set your own
- Inspect patchcords (male) and bulkheads (female)
- Connect directly to your PC with USB2.0
- Use your mouse or built-in freeze/capture button
- Enlarge images with digital zoom

DI-1000L-PRO Package



- DI-1000L USB 2.0 Digital Inspection probe
- CD with ConnectorView™ Plus v2 software, driver, and User's Manual
- Tip for SC and FC PC type female connectors
- Tip for LC PC type female connectors
- Universal tip for 2.5mm PC male connectors
- Universal tip for 1.25mm PC male connectors
- Soft carrying case

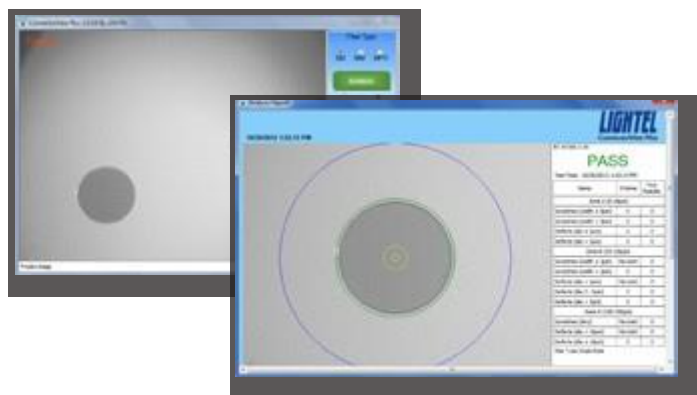

Auto-center your Analysis Reports



Include notes in your Analysis Reports

DI-1000L Specifications

Field of View	~ 680µm x 510µm
Detectable Resolution	0.5 µm detectable
Focus	Manual adjustment, 2mm max travel
Camera	1/3" CMOS
Light Source	Blue LED
Power Supply	PC USB2.0 port
Dimensions	175mm x ø35 mm (Probe without cap)
Weight	200g
Operating Temperature	0°C to 50°C
Storage Temperature	-20°C to 70°C
Supported Operating Systems	Windows XP®, Vista®, Windows 7® Windows 10 and 11® 32-bit and 64-bit processors



LIGHTTEL

2210 Lind Ave SW, Suite 100
 Renton, WA 98057 USA
 (425) 277-8000 Tel
 (425) 277-5280 Fax
www.lighttel.com